

EMPEROR - ER

Trefoil cable cleats where the highest levels of short-circuit withstand are required

Qualifications:

Tested at the British Short-Circuit Testing Station.

Approved for 83,3 kA RMS and 177 kA Peak.

Short circuit: 0,1 sek

Fixing distance: 300 mm

Test report can be provided upon request.

Materials: 316 Stainless steel type.

Liner of 0-Halogen LSF plastic.

Benefits: - Easy open- and close-function.


- Hole for three bolts 2xM10 + 1xM12.

Delivered with fixing bolt 1xM10x25 and flange nut as standard.

Other sizes on request.

Fixing distances can be calculated on excel sheet

on our website: www.procab.no.

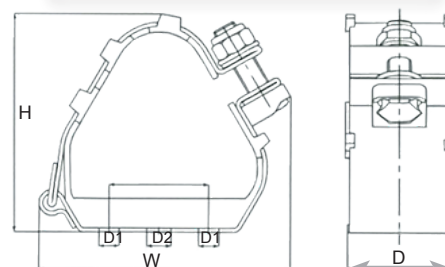

El.no	Title	Cable dia.		Dimensions				Weight g
		Min dia mm	Max dia mm	B(max) mm	H(max) mm	D mm	P mm	
13 181 43	ER 19-23	19	23	96	83	54	25	425
13 181 49	ER 23-28	23	28	96	83	54	25	425
13 181 50	ER 27-32	27	32	97	88	54	25	440
13 181 51	ER 30-35	30	35	99	91	54	25	445
13 181 52	ER 33-38	33	38	103	95	54	25	460
13 181 53	ER 36-42	36	42	124	100	54	50	600
13 181 54	ER 40-46	40	46	125	106	54	50	605
13 181 55	ER 44-50	44	50	130	117	54	50	630
13 181 56	ER 48-55	48	55	132	121	54	50	640
13 181 57	ER 51-58	51	58	136	128	54	50	650
13 181 58	ER 55-62	55	62	160	135	54	75	810
13 181 59	ER 59-66	59	66	163	143	54	75	825
13 181 60	ER 63-70	63	70	166	151	54	75	850
13 181 61	ER 67-74	67	74	169	158	54	75	850
13 181 62	ER 71-78	71	78	172	165	54	75	890
13 181 63	ER 74-82	74	82	177	171	54	75	890
13 181 64	ER 77-85	77	85	183	177	54	75	905
13 181 65	ER 82-88	82	88	191	187	54	75	820
13 181 66	ER 88-96	88	96	207	203	54	75	890
13 181 67	ER 96-103	96	103	221	218	54	75	940
13 181 68	ER 103-111	103	111	237	235	54	75	950
13 181 69	ER 111-119	111	119	253	250	54	75	1010
13 181 70	ER 119-128	119	128	265	275	54	75	1220