

Nexans GT2


Heatshrink tube, 0-Halogen

Heatshrink tubes for joints and terminations, suitable as primary insulation. Well suited for both indoor and outdoor use.

GT2 is halogen free, which makes it suitable together with similar characteristics.

GT2 is delivered without glue, if need of sealing, use red mastic supplied separately, el.no: 1819099.

- Material: Shrink plastic in polyolefin
- Shrink temp .: 125°C
- Continuous operating temperature from -40°C to 135°C
- 0-Halogen
- UV and erosion resistant
- Color: Red

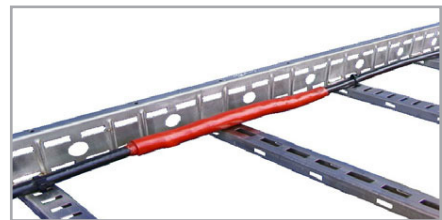

El.no.	Title	Diameter Before shrink/ after (mm)	Thickness fully shrunk (mm)	Meter per roll
18 191 83	GT2-20	23/8	1,4	40
18 191 84	GT2-30	34/10	2,5	40
18 191 85	GT2-35	39/12	2,8	40
18 191 86	GT2-40	48/19	2,9	30
18 191 87	GT2-50	59/24	3,0	20
18 191 88	GT2-60	65/29	3,1	20
18 191 89	GT2-70	80/38	3,2	20
18 191 90	GT2-100	120/50	3,8	20
18 191 91	GT2-130	130/50	4,0	20