

End-caps

End caps of shrink plastic, with adhesive

- Material: Shrink plastic of polyolefin
- Temp. area: -55 °C - 135 °C
- Shrink temp: 135 °C




El.no	Title	Inner dia. before shrinking mm	Inner dia. fully shrunk mm	Standard lenght per roll
11 320 90	CEC 10/4	10	4,0	44,0
11 319 33	EC 14/4	14	4	40,0
11 319 34	EC 24/8	24,0	8,0	60
11 319 35	EC 35/15	35,0	15,0	80,0
11 319 36	EC 55/25	55,0	25,0	90,0
11 319 37	EC 62/25	62,0	25,0	105,0
11 319 38	EC 75/34	75,0	34,0	160,0
11 319 39	EC 105/45	105,0	45,0	160,0
11 319 40	CEC 124/60	124,0	60,0	152,0
11 319 41	EC 160/61	160,0	61,0	190,0

Break-outs

Cable breakouts of shrink plastic, with adhesive

- Material: Shrink plastic of polyolefin
- Temp. area: -55 °C - 135 °C
- Shrink temp: 120 °C

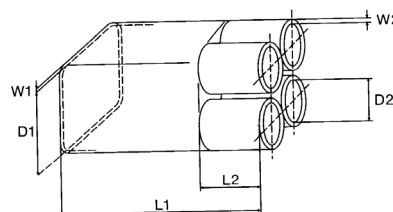

El.no	Title	Cable 1 kV mm ²	Before shrinking mm		Fully shrunk mm			
			D1	D2	D1	D2	L1	L2
11 319 43	ABOS LV3 38/14	16-50	38	14	17	4,5	98	23
11 319 44	ABOS LV3 60/25	50-150	60	25	24	8	183	45
11 319 45	ABOS LV3 80/35	95-300	80	35	38	11	215	57
11 319 46	ABOS LV3 110/46	240-400	110	46	50	17,5	250	65
11 319 48	ABOS LV4 40/14	4-50	40	14	18	4	94	22
11 319 49	ABOS LV4 55/20	25-95	55	20	21	8	150	38
11 319 50	ABOS LV4 75/25	50-150	75	25	32	8	173	48
11 319 51	ABOS LV4 82/30	120-300	82	30	37	9	190	60
11 319 52	ABOS LV4 102/38	240-400	102	38	47	12	198	58
11 319 42	ABOS LV4 130/52		130	52	52	15	240	75
11 319 47	ABOS LV4 160/64		160	64	70	18	260	75
11 319 96	EB5-35-15	25-50	35	20	15	4	100	21

- Other cable breakouts for 2, 5 og 6-core on request.