

# Ende 24TTGE3


## Nexans heatshrink termination for outdoor use 3 core, PEX-cable

TTGE3 is based on shrink plastic that is used for both anti-tracking protection and field distribution. Mastic adhesive ensure a good seal against the cable lugs and outer sheath. The skirts prevents water creepage tracks on the end terminations surface.

### Construction:

1. Cable-lug (mechanical)
2. Mastic
3. Antitracking shrink-tube
4. Field distribution shrink-tube
5. Field distribution mastic
6. Anti-tracking skirts (only for 36TTG11)
7. Breakout
8. Cu-screen or earth wire

The product meets the requirements for use of 36 kV for Cenelec HD 629.1 and IEC 60502-4.

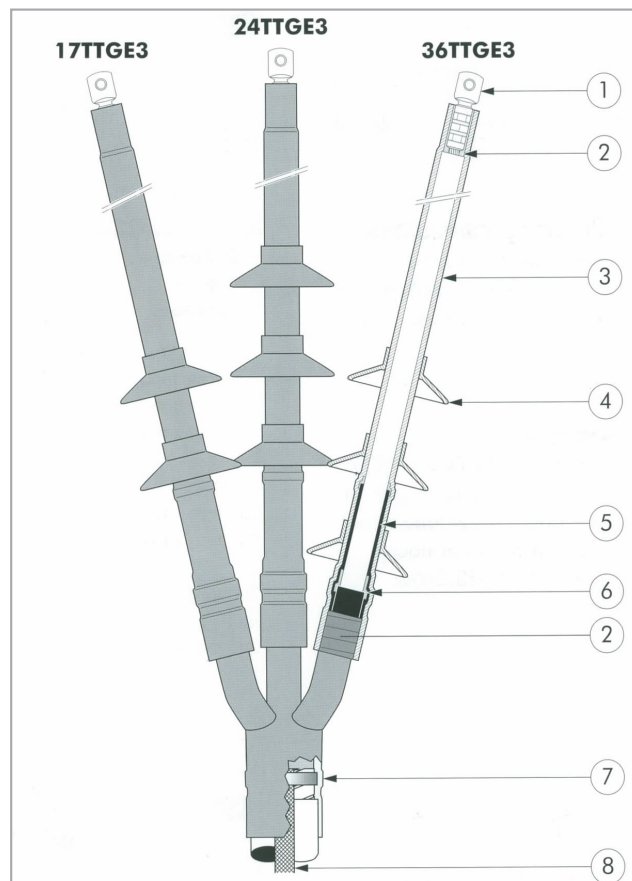

El.no	Title	Cross section mm <sup>2</sup>	Voltage kV
11 324 20	VK-24TTGE.3x10-16	10-16	24
11 324 21	VK-24TTGE.3x25-95	25-95	
11 324 22	VK-24TTGE.3x50-240	50-240	
11 324 99	VK-24TTGE.3x150-300	150-300	36

Contact ProCab AS for other voltages.