

FLAMELINK 250

Flame retardant cable splice for signal cables RFOU 250V



Description

Cable splicing concept based on flame retardant, Zero-halogen heat-shrinkable tubing. The splices are also suitable for cable type TFSI.

Qualification



The concept is tested and approved in acc. with:

- IEC 60332-1 (Flame retardent)
- IEC 61034-1 (Low smoke)

Test reports on request.

Special features

- Quick and easy installation
- Slim and limited diameter increase
- Each kit cover several cables
- Each kit includes appropriate connectors in acc. with DIN 46341-1 for 0,5-2,5mm²

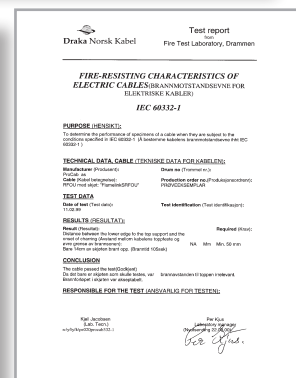

For selection table and product number, see next page.

ProCab AS
Teglverksveien 97
3057 Solbergelva, Norway

ProCab as
PRODUKTER FOR KABEL

Tel: +47 32 23 77 00
firmapost@procab.no
www.procab.no

SELECTION TABLE

Flamelink 250

Cable size mm ²	Product name	Product no.
1 pair 0,75-2,5 mm ²	FLAMELINK 250V 1-2p 0,75-2,5	11 317 05
2 pair 0,75-2,5 mm ²	FLAMELINK 250V 1-2p 0,75-2,5	11 317 05
4-5 pair 0,75-2,5 mm ²	FLAMELINK 250V 4-5p 0,75-2,5	11 317 06
7 pair 0,75-2,5 mm ²	FLAMELINK 250V 7p 0,75-2,5	11 317 07
8 pair 0,75-2,5 mm ²	FLAMELINK 250V 8p 0,75-2,5	11 317 08
12 pair 0,75-2,5 mm ²	FLAMELINK 250V 12-16p 0,75-2,5	11 317 09
16 pair 0,75-2,5 mm ²	FLAMELINK 250V 12-16p 0,75-2,5	11 317 09
19 pair 0,75-2,5 mm ²	FLAMELINK 250V 19-24p 0,75-2,5	11 317 10
24 pair 0,75-2,5 mm ²	FLAMELINK 250V 19-24p 0,75-2,5	11 317 10
32 pair 0,75-2,5 mm ²	FLAMELINK 250V 32p 0,75-2,5	11 317 11

Cable size mm ²	Product name	Product no.
1 triple 0,75-2,5 mm ²	FLAMELINK 250V 1-2t 0,75-2,5	11 317 12
2 triple 0,75-2,5 mm ²	FLAMELINK 250V 1-2t 0,75-2,5	11 317 12
4-5 triple 0,75-2,5 mm ²	FLAMELINK 250V 4-5t 0,75-2,5	11 317 13
7 triple 0,75-2,5 mm ²	FLAMELINK 250V 7-8t 0,75-2,5	11 317 14
8 triple 0,75-2,5 mm ²	FLAMELINK 250V 7-8t 0,75-2,5	11 317 14
12 triple 0,75-2,5 mm ²	FLAMELINK 250V 12t 0,75-2,5	11 317 15
16 triple 0,75-2,5 mm ²	FLAMELINK 250V 16-19t 0,75-2,5	11 317 16
19 triple 0,75-2,5 mm ²	FLAMELINK 250V 16-19t 0,75-2,5	11 317 16
24 triple 0,75-2,5 mm ²	FLAMELINK 250V 24-32t 0,75-2,5	11 317 17
32 triple 0,75-2,5 mm ²	FLAMELINK 250V 24-32t 0,75-2,5	11 317 17