

# FLAMELINK P15 UX

Flame retardant cable splice for ground cables type UX



## Description

Cable splicing concept based on flame retardent, Zero-halogen heat-shrinkable tubing.

## Qualifications


The concept is tested and approved in acc. with:

IEC 60332-1 (Flame retardent)

IEC 61034-1 (Low smoke)

Ferrules is included in the kit.

*Test reports on request.*

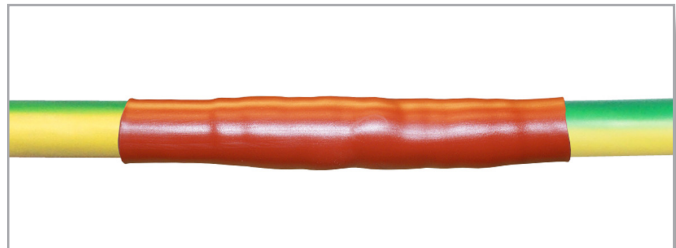

## Special features

- Quick and easy installation
- Slim and limited diameter increase
- Each kit cover several sizes

Volt kV	Conductor cross section range mm <sup>2</sup>	Product name	Product no.
0,6-1	16 - 35	FLAMELINK P15UX 1x16-35	11 323 52
	50 - 70	FLAMELINK P15UX 1x50-70	11 323 53

ProCab AS  
Kobbervikdalen 61  
3036 Drammen, Norway

**ProCab as**  
PRODUKTER FOR KABEL

Tel: +47 32 23 77 00  
firmapost@procab.no  
www.procab.no