

# Joint 24GTS1


Nexans heat-shrink joint for 12/24 kV  
PEX-isolated cable single core, Al. laminated outer sheath

24GTS1 series is based on shrink plastic that takes care of stresscontrol and electrical resistance. Field controlling mastic is used around ferrules and with the semiconductive handle on the cable.

The cables outer sheath is replaced by a shrink tube with adhesive that provides excellent sealing against water penetration on both sides of the joint.

As outer sheath replacement shrink sheets with interior aluminum laminate for extra water blocking and allowing sheath testing, is delivered.

The product meets the requirements of Cenelec HD 629.1 and IEC 60502-4.

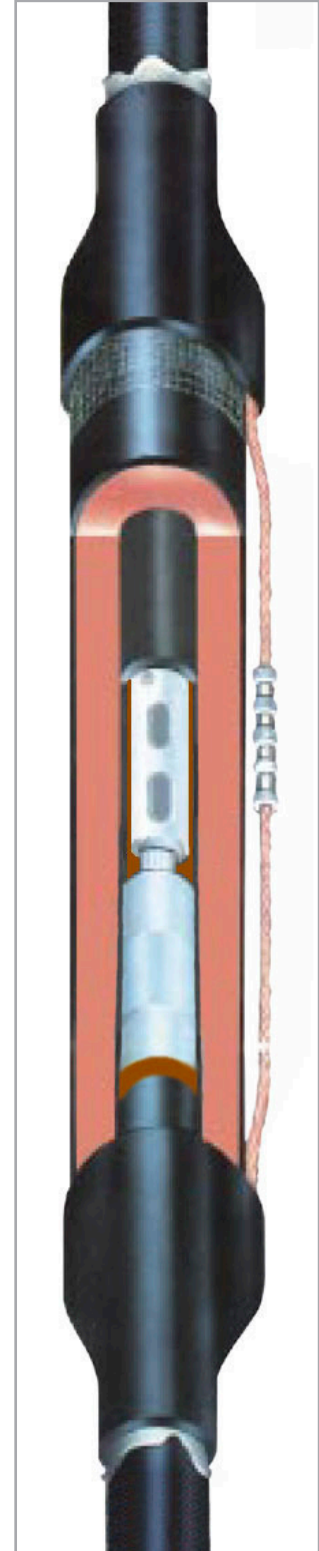

El. no	Title	Cross section mm <sup>2</sup>	Voltage kV
11 316 49	VKA-24GTS.1x25-50	25-50	12/24
11 316 50	VKA-24GTS.1x95-240	95-240	
11 317 46	VKA-24GTS.1x150-400	150-400	
11 317 48	VKA-24GTS.1x500-1000	500-1000	
11 324 66	VKA-12-24GTS1x1000-1600	1000-1600	