

Joint 36GTS1

Nexans heat shrink joint for 36 kV, PEX-isolated cable, single core


36GTS1 series is based on shrink plastic that takes care of stresscontrol and electrical resistance. Field controlling mastic is used around ferrules and with the semiconductive handle on the cable.

The cables outer sheath is replaced by a shrink tube with adhesive that provides excellent sealing against water penetration on both sides of the joint.

As outer sheath replacement or addition, shrink sheets with interior aluminum laminate for extra water resistance can be delivered.

Ferrules must be ordered separately.

The product meets the requirements of Cenelec HD 629.1 and IEC 60502-4.

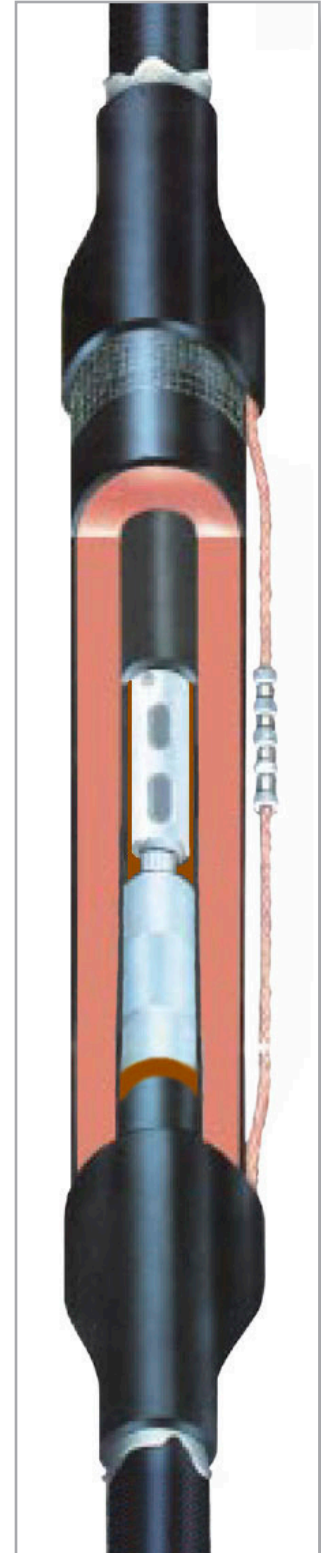

El. no	Title	Cross section mm ²	Voltage kV
11 321 03	VK-36GTS1 1x35-95	35-95	36
11 321 04	VK-36GTS1 1x70-240	70-240	
11 321 05	VK-36GTS1 1x185-630	185-630	
11 321 06	VK-36GTS1 1x400-800	400-800	
11 321 07	VK-36GTS1 1x630-1200	630-1200	