

# HHS 2000

High compressure resistant, adhesive lubricant for installation of stainless steel bolts A4/A2



- Color: Transparent.
- Synthetic lubricants for the lubrication parts exposed to high pressure, shock and vibration.
- The material comes thin and adhesive-free out of the box and enters all small passages etc.
- Immediate evaporation of the solvents leads immediately to a strong adhesion to metal.
- Suitable for locations where mineral oils ect. do not lubricate easily and when using lubricants where disassembly is otherwise required.
- Long acting - ideal for places that are not lubricated periodically.
- Resistant to water, salt water, weak acids and bases.
- Temperature resistant from -35 celsius to +200 celsius.



Ideal for installation of A2/A4-screws.

\* Decreases in-bolting resistance

\* Prevents cold welding when working with A2/A4-screws

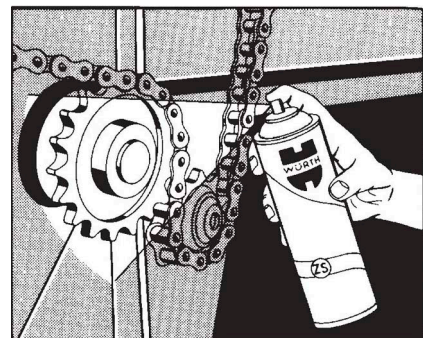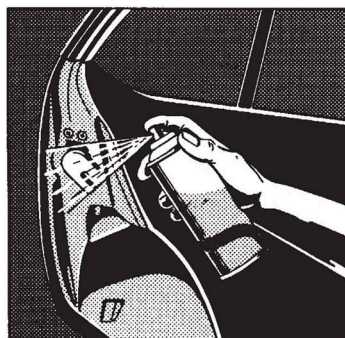

El.no	Title	Content, ml
88 402 70	Lubricants for A4 stainless steel bolts HHS 2000	500