

VARI CLEAT - VC

Trefoil cable cleats for trefoil single and bundled cable applications where moderate levels of short circuit withstand are required

Qualifications :

Testet by EFI / SINTEF.

Approved for use by short circuit up to 120 k Peak.

Fixing distance: 300 mm



Test report can be provided upon request.

Materials: Stainless steel, LSF self-extinguishing plastic, kevlar-coated Al.

Vari Cleat is also tested with a "heavy duty" additional part. In this construction, the cleats are approved for short circuit up to 132 kA peak with 30 cm cleat-distance.



To order this additional part, see the table on next page. Vari Cleat have a loose foot that is to be attached to the cleat-ladder before cabling. Straps and internal plastic coating are mounted and tightened after the cables are placed on the foot.

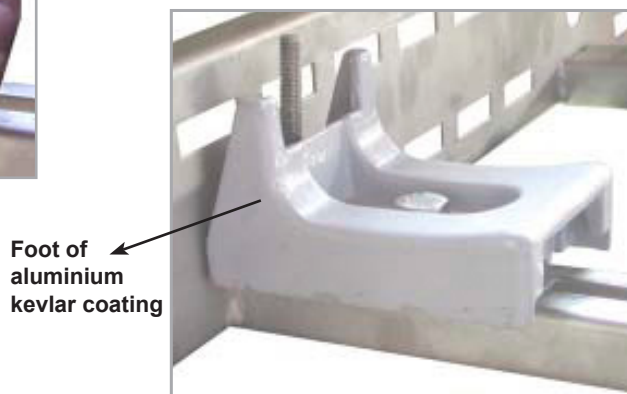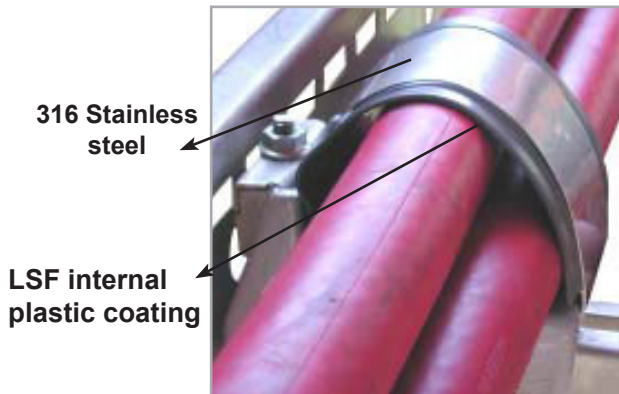

VARI CLEAT - VC

Selection table

El.no	Title	Cable Range No liner		Cable Range With liner	
		Trefoil dia mm	Single dia mm	Trefoil dia mm	Single dia mm
998600	VC-AN2	22-26	41-48	21-24	36-43
998601	VC-AN3	24-28	44-51	23-26	39-46
998602	VC-AN4	26-30	49-54	25-29	44-51
998603	VC-BN1	29-33	51-59	27-31	46-54
998604	VC-BN2	30-35	55-63	29-33	50-58
998605	VC-BN3	32-37	60-68	30-36	55-63
998606	VC-BN4	34-38	64-70	33-38	59-68
998607	VC-CN1	37-42	68-76	35-40	63-71
998608	VC-CN2	39-44	72-81	37-42	67-76
998609	VC-CN3	42-47	76-85	39-45	71-80
998610	VC-CN4	44-48	81-87	44-48	76-86
998611	VC-DN1	47-53	86-96	47-51	81-91
998612	VC-DN2	50-56	91-100	49-54	86-95
998613	VC-DN3	54-59	96-105	52-57	91-100
998614	VC-DN4	56-60	101-106	56-60	96-106
998615	VC-EN1	59-63,5	105-112	58-62	100-107
998616	VC-EN2	62-67	111-118	61-66	106-113
998617	VC-EN3	65-70	118-125	64-69	113-120
998618	VC-EN4	68-74	125-132	67-73	120-127
998619	VC-FN1	71-76	125-140	69-74	120-135
998620	VC-FN2	74-80	132-145	72-78	128-140
998621	VC-FN3	78-84	139-152	76-82	134-147
998622	VC-FN4	82-88	148-160	80-86	143-155
998623	VC-GN1	84-91	145-160	82-89	140-155
998624	VC-GN2	88-95	155-170	86-93	150-165
998625	VC-GN3	92-99	165-180	90-97	160-175
998626	VC-GN4	96-103	175-190	94-101	170-185
998627	VC-HN1	98-106	170-190	96-104	165-185
998628	VC-HN2	102-110	180-200	100-108	175-195
998629	VC-HN3	106-114	190-205	104-112	185-200