

PHOENIX - FP

Flame retardant cable clamps

For all types of cables or pipes in need of a flame retardant, corrosion safe and solid grip.


Available in 11 adjusted diameters from 10 to 65 mm.

Fixing bolts must be specified when ordering.


Qualifications:

Fire Tested acc. BS 5839-1: 2002 Section 26.2d.

Short circuit tested acc. IEC 61914 cd 1.0 2009-01.

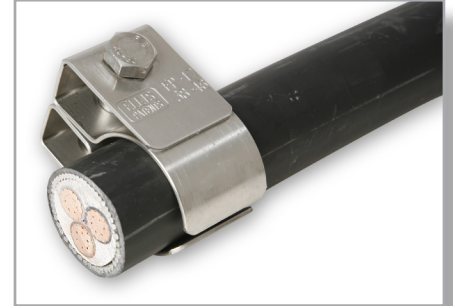

Materials: Stainless steel 316 L.

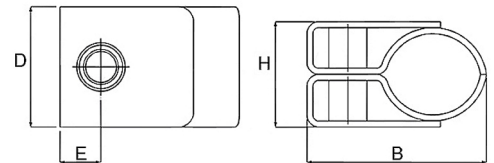

El.no	Title	Cable diameter		Dimension				Fixing bolts hole	Weight g
		Min dia mm	Max dia mm	B(max) mm	H(max) mm	D mm	E mm		
13 184 20	1FP-10SS	10	13	40	21	40	13,7	1xM10	91
13 184 21	1FP-11SS	13	16	44	24	40	13,7	1xM10	106
13 184 22	1FP-12SS	16	19	47	27	40	13,7	1xM10	113
13 184 23	1FP-13SS	19	23	51	31	40	13,7	1xM10	125
13 184 24	1FP-14SS	23	27	55	35	40	13,7	1xM10	139
13 184 25	1FP-15SS	27	32	60	40	40	13,7	1xM10	153
13 184 26	1FP-16SS	32	38	66	46	40	13,7	1xM10	174
13 184 27	1FP-17SS	38	46	74	54	40	13,7	1xM10	201
13 184 28	1FP-18SS	46	51	80	59	40	13,7	1xM10	225
13 184 29	1FP-19SS	51	57	85	64	40	13,7	1xM10	242
13 184 30	1FP-20SS	57	65	93	73	40	13,7	1xM10	265