


Nexans GT5

Conductive heatshrink
tube, without glue

Crosslinked heatshrink tube of black polyolefin, suitable to reconstruct the insulation screen and other situations where conductivity is desired.



- Material: Shrink plastic in polyolefin
- Shrink Temp .: 125 ° C
- Continuous operating temperature from -40°C to 135°C
- Max. voltage: 52 kV
- Color: Black

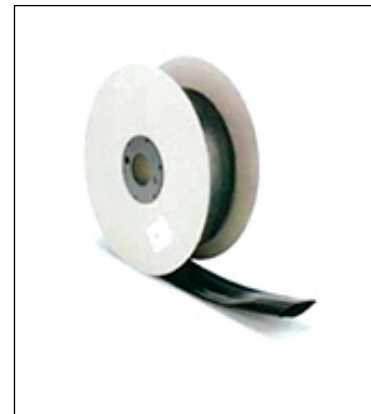

El.no.	Title	Diameter Before shrink/ Fully shrunk(mm)	Thickness shrunked (mm)	Meter per roll
18 190 55	GT5-35	41/12	2.5	40
18 190 56	GT5-50	56/16	2.5	40
18 190 57	GT5-80	81/22	2.8	40
18 190 58	GT5-95	101/25	3.0	30
18 190 59	GT5-140	149/42	4.2	30