

Termination OTK

Nexans, 12/24 kV Termination, cold shrink,
for outdoor use

Termination for indoor use on single medium voltage cable 12/24 kV.


ITK 224/324 is a termination of, type cold shrink, produced of very flexible silicone rubber, which uses the stress cone principle for stresscontrol. The silicone rubber material gives the termination a very good resistance against leakage currents.

The product has been tested and approved by Cenelec HD 629.S1.

Each set contains of three complete single terminations with Norwegian assembly instructions.

Lugs must be ordered separately according to the pressure system to be used.

- No heated tools
- Quick and easy installation
- Great cross-section flexibility
- Short bulding height
- Consistent quality on the mounting

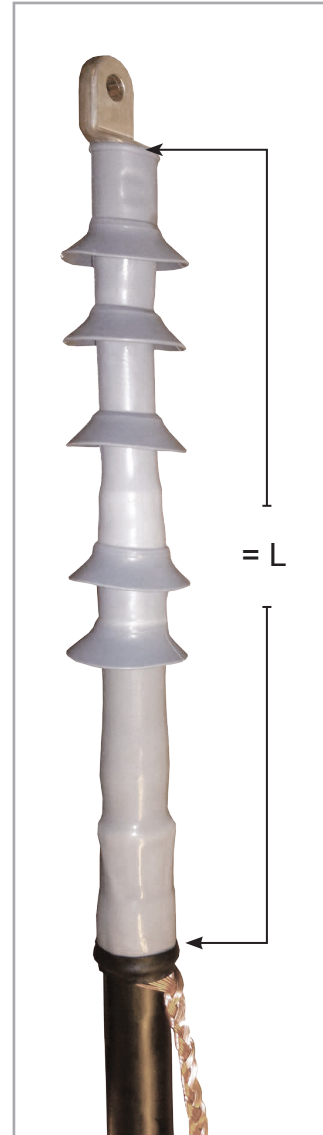

El. no	Title	Cross-sec mm ² 12kV	Cross-sec mm ² 24kV	L	Voltage kV
11 323 81	KK-OTK 224	3x1x50 -240	3x1x50-240	400	12/24
11 323 82	KK-OTK 324	3x1x400-800	3x1x300-630	650	