

# L-M


## Non-insulated ferrules

Non-insulated ferrules 0,5-70 mm<sup>2</sup> form B, DIN 46341.

**Description:** Tinplated surface, sleeves with mid-stop.

**Suitable tool:** To be crimped with DIN 48083 hexagonal dies.

Reduction ferrules available on request.

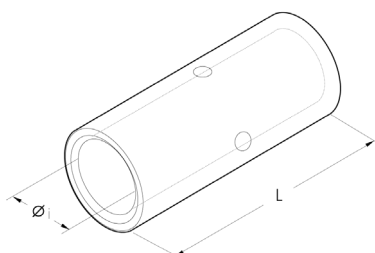

El.nr.	Benevnelse	Tverrsnitt mm <sup>2</sup>	Cembre tools MECHANICAL				Cembre tools HYDRAULIC				Øi	L	Quantity Box / Bag					
20 199 12	L03-M	0,5-1,5	HN1					B15MD					1,8	15	6.000/100			
20 199 13	L06-M	1,5-2,5												2,4	15	4.000/100		
20 199 14	L1-M	4-6												3,6	22	2.000/100		
20 199 15	L2-M	10		HN5				B15MD	HT45-E B45ND-BV	HT51	RH50 B500 B500ND	HT81-U RHU81	HT120 og verktøy og holder med 130 kV	ECW-H3D	RHU520	4,6	25	1.000/100
20 199 16	L3-M	16			HN-A25													
20 199 17	L5-M	25			TN70SE											7,0	29	500/100
20 199 18	L7-M	35															8,9	33
20 199 19	L10-M	50			TN120SE											10,0	37	200/50
20 199 20	L14-M	70															11,3	39
20 205 14	L19-M	95														13,5	43	100/25
20 205 15	L24-M	120														15,2	47	100/25
20 205 16	L30-M	150														16,7	58	50/25
20 205 17	L37-M	185														19,2	64	50/25
20 205 18	L48-M	240														21,1	75	30/15
20 205 19	L60-M	300														23,7	90	20/10
20 205 20	L80-M	400														27,0	94	15/5
20 205 21	L100-M	500														30,3	98	12/1
20 205 22	L120-M	630														33,4	105	12/1
20 205 23	L160-M	800														38,0	112	9/1
20 205 24	L200-M	1000														44,0	120	9/1