


Cable lugs CAA-M

Al-conductor, for low and high voltage

The barrels of series CAA-M connectors are made from aluminium EN AW-1050A according to UNI EN 573-3 of a purity equal to or greater than 99,5% and electrolytical copper Cu-ETP CW004A according to UNI EN 13601. The barrel is friction welded to the palm thus achieving the best possible transition between the copper palm and aluminium barrel. Barrels are capped and filled with grease so as to avoid oxidation of the aluminium.

See table for dies on page 234, Dies for low and high voltage, Al-conductors.

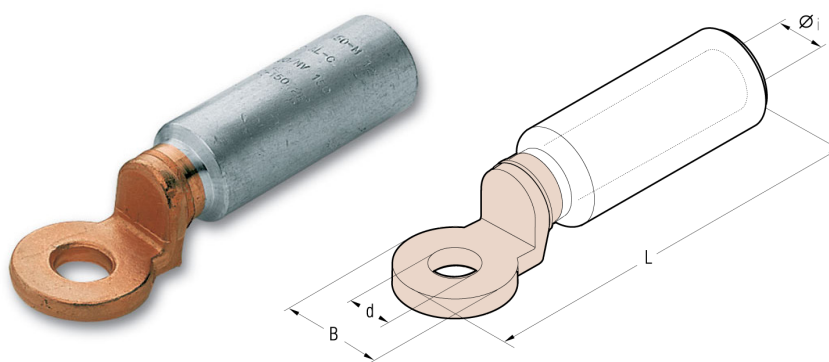

El.no.	Title	Cross section mm ²	Dimensions				Quant. package	Hydraulic tools	
			Øi	B	L	D			
20 198 94	CAA50-M12	50	9,0	24,0	87,0	13,0	60/3	HT131-UC RHU131-C B1300-UC	
20 198 96	CAA95-M12	95	12,5	24,0	87,0	13,0	60/3		
20 198 99	CAA150-M12	150	15,5	31,0	111,0	13,0	30/3		
20 199 01	CAA240-M12	240	19,5	35,0	116,0	13,0	18/3		
20 199 02	CAA400M16	400	26,0	35,0	152,5	16,5	12/3	ECW-H3D	RHU230-630