

RAIL DRILLING MACHINE

LD-16B-RP

GENERAL FEATURES

- Drilling range: Ø 7÷33 mm
- Ø 7 ÷ 13 mm (with Cembre PE range spiral bits)
- Ø 13 ÷ 33 mm (with Cembre CY range broach cutters)
- Max. railweb thickness: 50 mm
- Degree of Protection (Engine & Battery): IP 44M (EN 60529)
- Speed of the shaft without load: 260 rpm
- Battery: 36V-6.2 Ah Li-Ion with LED residual charge indicator
- Weight with battery and clamping device DBG-F2: 18,9 kg
- Dimensions LxWxH: 489 x 261 x 485 mm

[Product movie on YouTube](https://youtu.be/yBhA7iiWO1U)

<https://youtu.be/yBhA7iiWO1U>



Broach cutters CY


New CY broach cutter family is made by Cembre and has been specifically designed for optimum use with Cembre rail drilling machines.

For more details see separate page.



KPAF "Double sided" template kit

Unlike standard templates for positioning rail drills, KPAF kits have a double profile that enables positioning of the drill on two different types of rail by simply rotating the inserts fixed on the sides of the front plate.

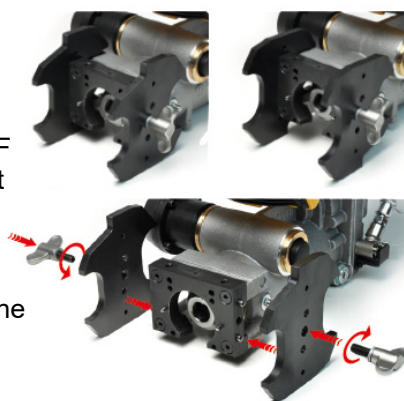

Art. no.	Title	Broach cutter size. mm	Rail thickness mm
99 22 05	LD-16B-RP	7-33	Up to 40mm