

PANDROL FASTENING MACHINE PCMD-FC and PCMD-EC

Machines PCMD-FC for PANDROL FC, FE, FCX and PCMD-EC for PANDROL E-CLIP

New



conforming to
EN13977
conforming to

POWERED by
HONDA



A completely re-engineered petrol-powered Pump unit and control system featuring automatic acceleration to increase power output only when required, thereby reducing HAV, noise and fuel consumption.



Machine settings are achieved without tools and rear arms have protection against damage with adjustable gas springs for assured machine lifting in all weather.



Improved machine ergonomics, access to controls and powerful LED lighting of the working area.



A folding operating handle to reduce the risk of transportation damage.

ProCab AS
Kobbervikdalen 61
3036 Drammen, Norway

ProCab as
PRODUKTER FOR KABEL

Tel: +47 32 23 77 00
firmapost@procab.no
www.procab.no



Performance

Simple to use with simultaneous insertion or extraction of both clips by two independent clamps, promoting operator confidence and rapid progress.



Control panel

The operator can easily access all the controls of the unit.



Braking system

PCMD meets the requirements of EN13977.



OLED Display

OLED Display of number of operations, service recommended and warnings.



3rd Wheel Bar

3rd Wheel Bar designed for use on 3rd rail systems.



Operation

PCMD is designed for single-man working.



Track under construction

Undesirable movement of sleepers, where ballast is not yet in situ, is avoided due to the reciprocal independence of the clamps, enabling work to be carried out during rail setting.



Clamps

PCMC-FC FASTCLIP machine clamps are designed for operations on 3rd and 4th rail systems.

See details on the next page.

| Art.no. | Title |
|----------|---------------------------------------|
| 99 27 00 | Complete fastening machine, Fast-clip |
| 99 27 01 | Complete fastening machine, E-clip |
| 99 27 06 | Balance arm CR-PCMD |

OPTIONAL ACCESSORIES FOR CEMBRE MACHINES FOR PANDROL FASTENING

Tarpcover 019-PCM

Robust UV resistant cover for PCMD machines. Temperature range: -40°C to +70°C.


| Art.no. | Title |
|----------|-------------------|
| 99 27 07 | Tarpcover 019-PCM |



PANDROL FASTENING MACHINE

FAST CLIP - Fastening machine PCMD-FC for Pandrol clamps FC, FE og FCX



PARKED
POSITION

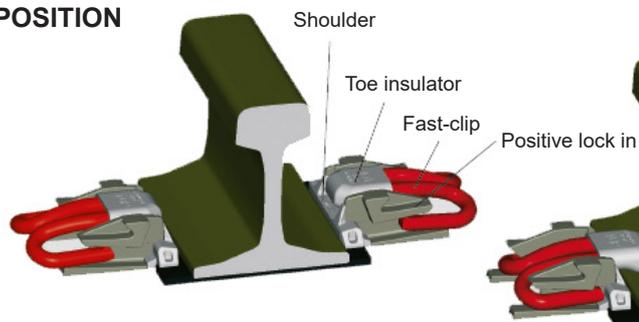

INSTALLED
POSITION



INSULATOR
CHANGING
POSITION

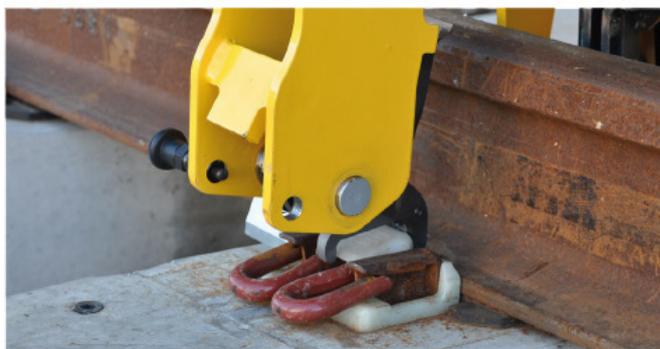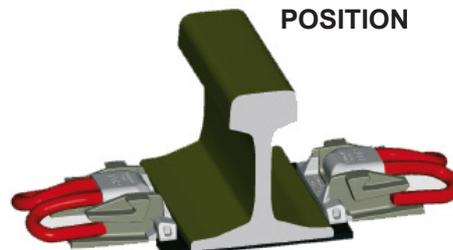

E-CLIP - Fastening machine PCMD-EC for E-clip

Insertion

At the end of each insertion operation, an easily adjustable limit switch ensures clips are not over stressed.

Extraction

Removed clips are kept close by the machine, not dangerously ejected, ensuring a high level of operator safety.



ProCab AS
Kobbervikdalen 61
3036 Drammen, Norway

ProCab as
PRODUKTER FOR KABEL

Tel: +47 32 23 77 00
firmapost@procab.no
www.procab.no