

# MONOe

## Outdoor termination for single- and 3-core indoor medium voltage cable type TSLE-TSLF, without cable lugs


Termination set for single core PEX-insulated high-voltage cable, type TSLE / TSLF, 12, 24 and 36kV. The MONO series consists of a shrink current resistant shrink tube containing a field controller coating (stress control). Mastic glue provides sealing against cable lugs and outer jacket.

Each set contains

- 3 complete single core end terminations
- Red mastic
- Black field-distributing mastic
- Cu-thread
- Cleaning cloths
- Assembly description

The product has been tested and approved for use up to and including 36 kV after Cenelec HD 629.152 and IEC 60502-4.

- Easy assembly
- Supplied with screw cable lugs
- For 36kV, earthing set type CR is recommended for the Al laminat

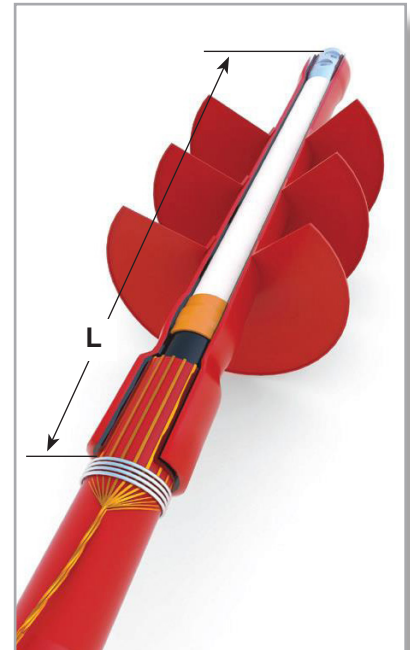

### Single core

El.no.	Title / Cross section mm <sup>2</sup>	L mm	Insulation dia.	Outer jacket dia.	Voltage kV
11 414 18	Termination VK12 MONOe 3x1x25-95	500	12-20	20-34	12kV
11 414 19	Termination VK12 MONOe 3x1x95-300	500	18-32	26-44	
11 414 20	Termination VK12 MONOe 3x1x185-400	500	22-36	28-48	
11 414 21	Termination VK12 MONOe 3x1x400-630	500	26-42	36-54	
11 413 30	Termination VK12 MONOe 3x1x630-1000	500	34-52	42-58	
11 413 31	Termination VK12 MONOe 3x1x1000-1200	500	44-58	48-64	
11 414 22	Termination VK24 MONOe 3x1x25-95	500	14-26	24-42	24kV
11 414 23	Termination VK24 MONOe 3x1x95-300	500	20-38	32-50	
11 414 24	Termination VK24 MONOe 3x1x185-400	500	25-40	36-52	
11 414 25	Termination VK24 MONOe 3x1x400-630	600	30-46	38-60	
11 413 36	Termination VK24 MONOe 3x1x630-1000	600	36-56	44-64	
11 413 37	Termination VK24 MONOe 3x1x1000-1200	600	46-60	52-66	
11 414 26	Termination VK36 MONOe 3x1x25-95	550	20-32	30-44	36kV
11 414 27	Termination VK36 MONOe 3x1x95-300	550	24-42	38-54	
11 414 28	Termination VK36 MONOe 3x1x185-400	550	28-46	42-60	
11 414 29	Termination VK36 MONOe 3x1x400-630	650	32-52	44-66	
11 413 42	Termination VK36 MONOe 3x1x630-1000	650	42-60	48-70	
11 413 43	Termination VK36 MONOe 3x1x1000-1200	650	48-64	54-72	

### Additional kit for 3-core

El.no.	Cross section mm <sup>2</sup>	Standard length*	Title	Voltage kV
11 413 44	25-95	0,7m x 3	Additional kit 3-1 VK12&24 MONOe 3x25-95	12/24kV
11 413 45	120-240	0,7m x 3	Additional kit 3-1 VK12&24 MONOe 3x120-240	

\* Other lengths on request

### Additional kit for earthing of Al-laminate

Art.no	Title	Cable dia.
11 000 07	CR- Cheese Rasp sett a 3stk	18-29
11 000 08	CR- Cheese Rasp sett a 3stk	23-41
11 000 09	CR- Cheese Rasp sett a 3stk	39-64